


Flag Assembly Parts

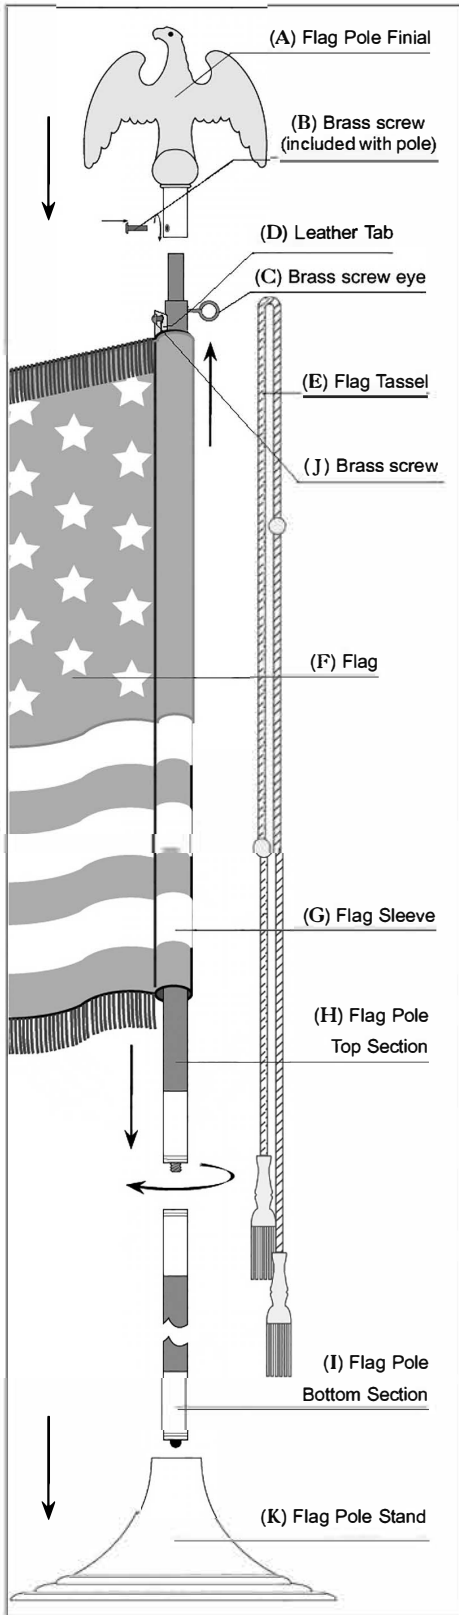

Indoor Flag Set Assembly Instructions

Your Flag Set should arrive in two separate packages, which will include: (A) Flag Pole Finial (Eagle, Cross, Ball, etc.); (B) Brass Screw; (J) Brass Screw; (C) Brass Screw Eye; (E) Flag Tassel (not included with all sets); (F) Flag with Sleeve; (H),(I) Two Flag Pole Sections (wood sections with brass/silver fittings); (K) Flag Pole Stand.

To Assemble Flag Set

Before starting assembly, you may wish to remove the flag from its box and press it with a warm iron or use a steamer to remove creases. If your stand (K) is unweighted, you will want to also want to pour sand (available at your local hardware store) into it to give it enough weight to remain stable when the flag set is installed. An opening for the sand will be found on the underside of the stand.

1 Install brass screw (J) and screw eye (E), about 1/2" down from the bottom of the finial on opposite sides. Find the open "pocket" or "sleeve" (G) at the back of the flag (F). Slide the sleeve (G) on the top pole section (H), top edge first, until the top of the flag reaches the screw (J). Find the tab (D) at the top of the flag sleeve (G) and slip onto the head of the brass screw (J) to hold the flag in place.

2 Lay the tassel (E) cord over the screw eye (C) as shown in the drawing:

3 Slide the finial (A) over the top of the pole (H). Screw brass screw (B) through the pre-drilled holes in the finial (A) till it is secure against the pole (H).

Screw bottom pole (I) to top pole (H). Use included lubricant if necessary (7 and 8 ft only). Place completed assembly into the stand (K).