


LED Combo Exit/Emergency Light



- Combination LED Exit & Emergency Light
- Long Life LED Legend & Lamps
- Completely Self-Contained Fully Automatic Operation
- Push to Test Switch
- Automatic Low Voltage Disconnect (LVD)
- Input Voltage: 120 or 277 VAC Operation
- Charge Rate/Power On LED Indicator Light
- Energy Consumption of 2 to 4 Watts
- Injection-Molded, UL 94 V-0 Flame Retardant, High Impact, Thermoplastic Housing
- Fully Adjustable Glare-Free 3.6V LED Lamps
- Operating Temperature: 50°F to 104°F

- Heads Rotate for Maximum Light Field Flexibility
- Universal Mounting Canopy for Top or Back J-box Installation & 2 Snap-fit Face Plates
- Field Replaceable Chevron Directional Indicators
- Integral Wiring Channels to Facilitate Installation
- 3.6 Volt 900 mAh Sealed Ni-Cad Rechargeable Maintenance-Free Battery
- Environmentally-Coated, Solid State Charger
- Color Temperature: 7000K
- Damp Location Rated
- UL 924 Listed; DOE & CEC Title 20 Compliant
- 3 Year Warranty
- See Pg 100 for Remote Lamp Heads

SELF DIAGNOSTIC FEATURE PERFORMS MONTHLY, BI-ANNUAL AND ANNUAL TESTS AUTOMATICALLY TO ENSURE RELIABLE OPERATION AND MEET LIFE SAFETY CODE REQUIREMENTS

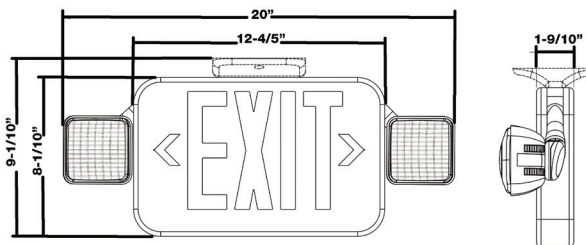

CAT. NO.	LED COLOR	HOUSING COLOR	LUMENS PER HEAD	WIDTH	DEPTH	HEIGHT	CASE QTY	EACH
HIGH OUTPUT COMBO								
73462	RED	WHITE	76	20"	2"	8.10"	4	
73463	RED	BLACK	76	20"	2"	8.10"	4	
73464	GREEN	WHITE	76	20"	2"	8.10"	4	
73465	GREEN	BLACK	76	20"	2"	8.10"	4	
HIGH OUTPUT REMOTE CAPABLE COMBO (USE ONLY LED REMOTE HEADS)								
73466	RED	WHITE	76	20"	2"	8.10"	4	
73467	RED	BLACK	76	20"	2"	8.10"	4	
73468	GREEN	WHITE	76	20"	2"	8.10"	4	
HIGH OUTPUT COMBO WITH SELF DIAGNOSTIC								
73470	RED	WHITE	76	20"	2"	8.10"	4	
73472	GREEN	WHITE	76	20"	2"	8.10"	4	
HIGH OUTPUT REMOTE CAPABLE COMBO WITH SELF DIAGNOSTIC (USE ONLY LED REMOTE HEADS) (WILL NOT OPERATE CORRECTLY UNLESS USED WITH REMOTE HEADS)								
73474	RED	WHITE	76	20"	2"	8.10"	4	
73476	GREEN	WHITE	76	20"	2"	8.10"	4	