

4FT WATTAGE & COLOR ADJUSTABLE VAPOR TIGHT LIGHT

LEDVAPR1000051823 - TS-TPL3-4FT50W-X-TCP(XX)



| | |
|------------|--|
| Project: | |
| Type: | |
| Catalog #: | |



This 4-foot LED Linear vapor tight light replaces traditional 2-lamp 32W fluorescent vapor tight lights. This light uses integrated LEDs so there are no bulbs to change - the LEDs are rated to last the life of the fixture. Designed for long life-span, it is suitable for flush or suspension mounting (suspension mounting hardware sold separately). The fixture is completely sealed from dust and water intrusion and safe for use outdoors. It is ideal for indoor or outdoor settings such as parking lots, tunnels, warehouses, barns, and more.

Product Features

- **Color Temperature:** 3500K/4000K/5000K Selectable
- **Power Use:** 30W/40W/50W Selectable
- **Fluorescent Equivalent:** 1- or 2-Lamp 32W T8 (32W or 64W Total)
- **Housing:** Plastic Housing
- **Optical Lens:** PC Diffuser
- **Beam Angle:** 120°
- **LED Life Hours:** Rated to last 50,000 hours
- **Dimmable:** 0-10V dimming
- **Voltage:** AC120-277V, 50/60Hz
- **Power Factor:** >0.9
- **Total Harmonic Distortion (THD):** <20%
- **Color Rendering Index (CRI):** 80
- **Operating Temperature:** -4°F ~ 113°F (-20°C ~ 45°C)
- **Warranty:** 5 year warranty

Safety & Performance Listings

- ETL listed
- DLC Standard V5.1
- Complies with RoHS requirements
- Complies with FCC Part 15, class B.

4FT WATTAGE & COLOR ADJUSTABLE VAPOR TIGHT LIGHT


LEDVAPR1000051823 - TS-TPL3-4FT50W-X-TCP(XX)

Dimensions

L - 47.24"

W - 3.74"

H - 3.27"

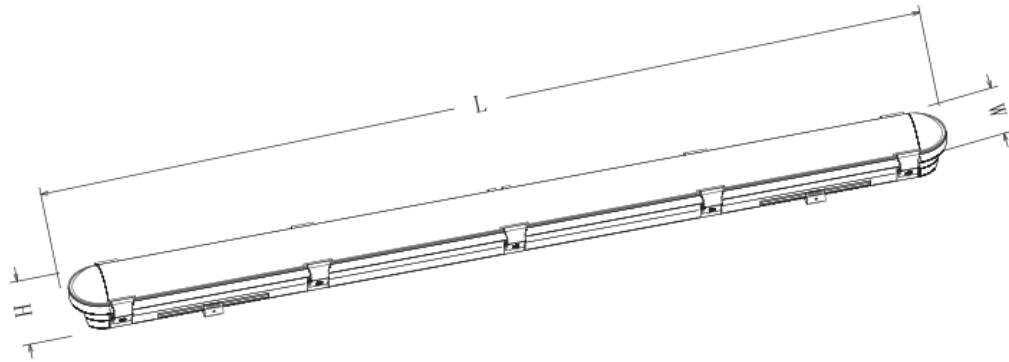

Electrical Specifications


| Model | Watts | Lumens | LPW | CCT | CR I | Voltage | Beam Angle | Dimming |
|--------------------------|-------|--------|-----|-------|------|---------|------------|----------------|
| TS-TPL3-4FT50W-X-TCP(XX) | 30W | 4200 | 140 | 3500K | 80 | 120-277 | 120 | 0-10V Dimming* |
| | 40W | 5600 | | 4000K | | | | |
| | 50W | 7000 | | 5000K | | | | |

*0-10V required and sold separately.

DLC Brand - Torshare | DLC Product ID: S-VZPR2L

Photometrics

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

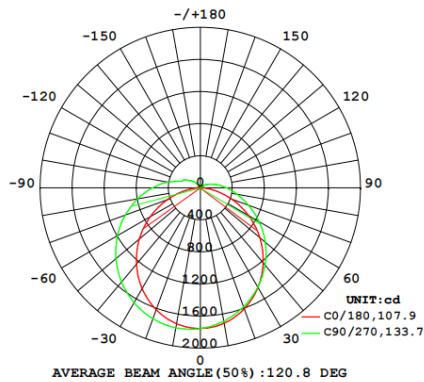

| Accessories (Sold Separately)

LEDMKVT1000051824 - Corner Bracket

LEDMKVT1000051825 - Junction Box Mounting Kit

LEDMKVT1000051823 - 60" Safety Rope

Packing

Individual Packaging Dimensions: 48.70" x 4.72" x 4.05"

G.W. 2.70#

Carton - 8pcs/ctn - Dimensions: 49.29" x 19.88 x 9.25"

G.W. 23.54#