

Adjustable Landscaping Light

Outdoor Lighting



55W

With our Adjustable Landscaping Light, you can angle it exactly where you need it

Features

- UL cUL DLC certificate
- Philips Lumileds Chip, high CRI
- Up to 116 Lumens per watt.
- Easy to install and operate
- Optional Landscaping Bracket

Advantage

- IP65 Internal driver,
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

Recommended Use

- Entrance lighting / Courtyard lighting
- Industrial lighting / Outdoor landscape lighting
- Building / Hotels & Motels

Input Voltage

- 100-277Vac

Qualification



Ajustable Landscaping Light

Outdoor Lighting

Product

Adjustable Landscaping Light		
SKU #	150466	150315
MODEL #	BLT-WP05-55WAT1A1	BLT-WP05-55WAT1A1
COLOR TEMPERATURE	3000K	5000K


Specifications

CONSUMPTION	55W
LUMEN	6600LM
CCT OPTIONS	3000K & 5000K
VIEWING ANGLE	60°
INPUT VOLTAGE	100-277Vac 50/60Hz
POWER FACTOR	>0.9
WATERPROOF RATING	IP65

Fixture Specifications

LED BRAND	PHILIPS LUMILEDS
LED TYPE	luxeon 3030 2D (1.5W)
LED QTY	(70 PCS 55W)
HOUSING	Aluminum
OPTIONAL ACCESSORIES	Photocell

CORRELATED
COLOR TEMPERATURE
(CCT)

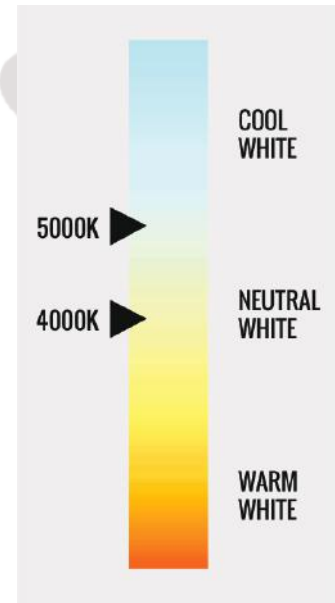

Others

OPERATING TEMPERATURE	APPLICATION	CRI	BEAM ANGLE	DIMMABLE
-4°F TO 113°F	Outdoor	>70	100-50°	No

Warranty & Qualification

WARRANTY	UL LISTED	DLC
5-Year Limited	Yes	Yes

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 01/24/2019




1939 Parker Court Suite C, Stone Mountain, GA 30087 | Phone: (866) 786-1117 |

www.beyondledtechnology.com


Adjustable Landscaping Light

Outdoor Lighting

Drawing

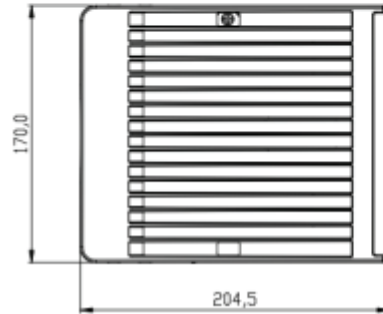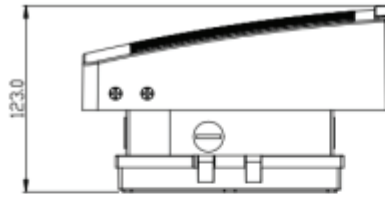

Package	Lamps Net Weight	Qty/Carton	Size	Weight/Carton
Inner Box	4.4 lbs	1 PCS	9.3" x 8.9" x 10.6"	5.7 lbs
Outer Box	4.4 lbs	2 PCS	18.4" x 9.8" x 11.4"	12.56 lbs

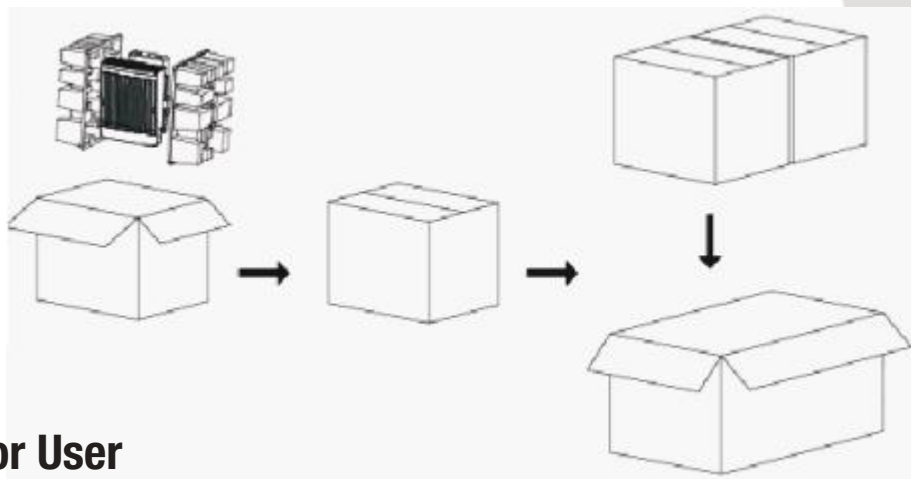

Notice For User

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated
- Licensed Electrician Installation ONLY.

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 01/24/2019

1939 Parker Court Suite C, Stone Mountain, GA 30087 | Phone: (866) 786-1117 |



www.beyondledtechnology.com

Adjustable Landscaping Light

Outdoor Lighting

Light Distribution Testing Parameters

Lumens(lm): 6114.58
 Efficiency(%): 0.00%
 Lumens(lm)/Power(W): 116.40
 Central Intensity(cd): 2141.353
 Maximum Intensity(cd): 4459.257
 Angle of Maximum Intensity: C=22.5 y=35.0
 Beam Angle(50%Imax): [C0/180]Total=104.3
 [C90/270]Total=41.4
 Field Angle(10%Imax): [C0/180]Total=130.8
 [C90/270]Total=116.0
 Maximum s/h(1/2): C0_180=1.91 C90_270=1.39
 Maximum s/h(1/4): C0_180=1.69 C90_270=1.17
 Up Flux Rate of Lamp(%):0.00%
 Down Flux Rate of Lamp(%):0.00%
 Up Flux Rate of LUM(%): 0.11%
 Down Flux Rate of LUM(%): 99.89%
 CIE Type: Direct Lighting
 Output Flux Ratio in π Solid Angle: 91.277%

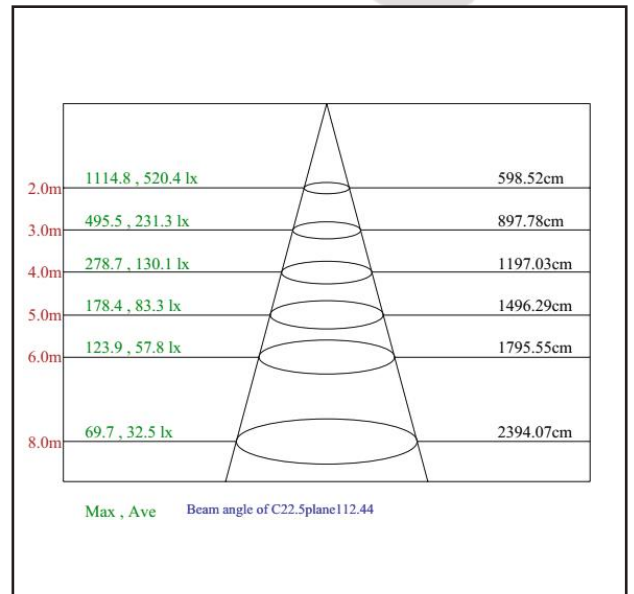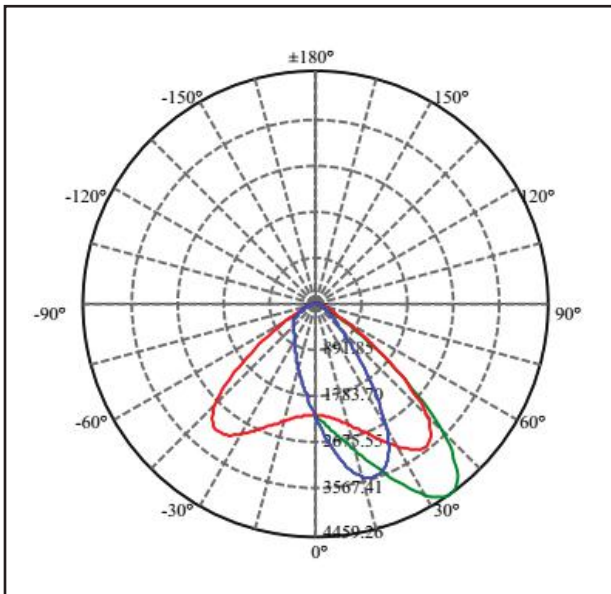

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 01/24/2019

1939 Parker Court Suite C, Stone Mountain, GA 30087 | Phone: (866) 786-1117 |

www.beyondledtechnology.com



Adjustable Wall Pack

Outdoor Lighting



55W

With our Adjustable Landscaping Light, you can angle it exactly where you need it

Features

- UL cUL DLC certificate
- Philips Lumileds Chip, high CRI
- Up to 116 Lumens per watt.
- Easy to install and operate
- Optional Landscaping Bracket

Advantage

- IP65 Internal driver,
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

Recommended Use

- Entrance lighting / Courtyard lighting
- Industrial lighting / Outdoor landscape lighting
- Building / Hotels & Motels

Input Voltage

- 100-277Vac

Qualification



Ajustable Landscaping Light

Outdoor Lighting

Product

Adjustable Landscaping Light		
SKU #	150468	150315
MODEL #	BLT-WP05-55WAT1A1	BLT-WP05-55WAT1A1
COLOR TEMPERATURE	5000K	5000K


Specifications

CONSUMPTION	55W
LUMEN	6200LM
CCT OPTIONS	3000K & 5000K
VIEWING ANGLE	60°
INPUT VOLTAGE	100-277Vac 50/60Hz
POWER FACTOR	>0.9
WATERPROOF RATING	IP65

Fixture Specifications

LED BRAND	PHILIPS LUMILEDS
LED TYPE	luxeon 3030 2D (1.5W)
LED QTY	(70 PCS 55W)
HOUSING	Aluminum
OPTIONAL ACCESSORIES	Photocell

CORRELATED
COLOR TEMPERATURE
(CCT)

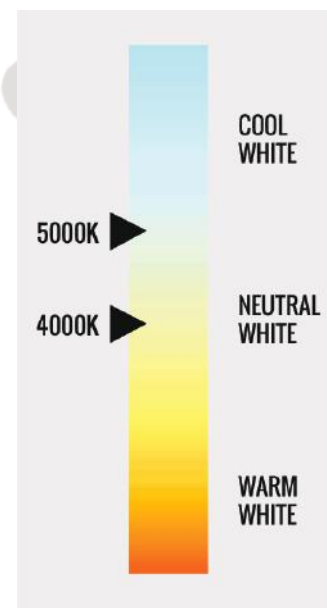

Others

OPERATING TEMPERATURE	APPLICATION	CRI	BEAM ANGLE	DIMMABLE
-4°F TO 113°F	Outdoor	>70	100-50°	No

Warranty & Qualification

WARRANTY	UL LISTED	DLC
5-Year Limited	Yes	Yes

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 01/24/2019


1939 Parker Court Suite C, Stone Mountain, GA 30087 | Phone: (866) 786-1117 |

www.beyondledtechnology.com

Adjustable Landscaping Light


Outdoor Lighting

Drawing

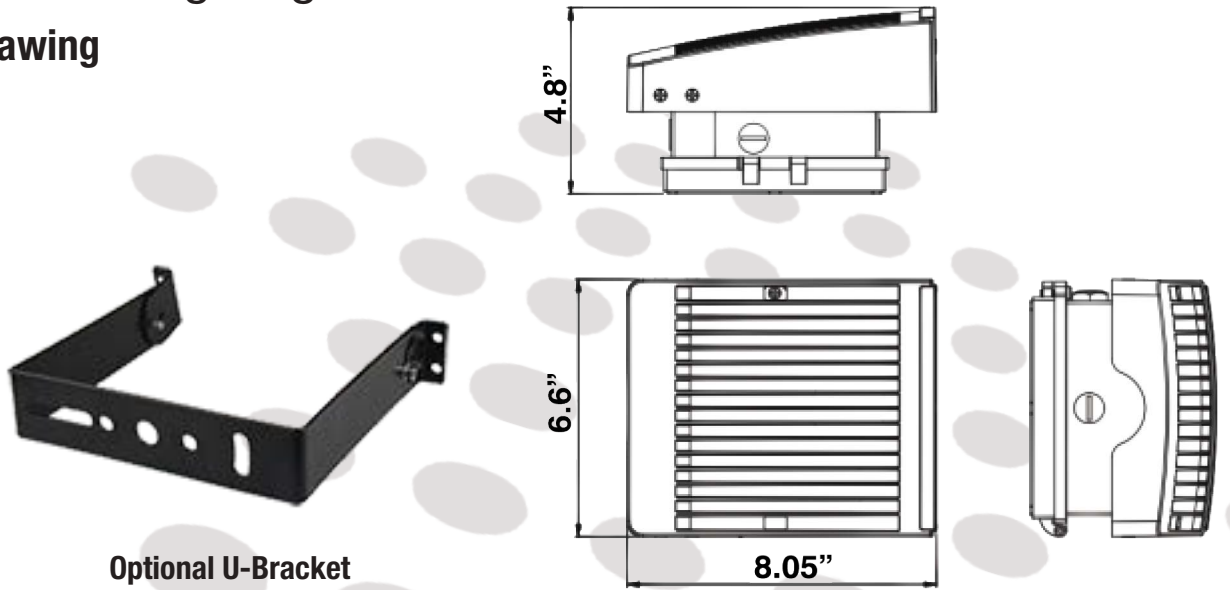

Optional U-Bracket

Package	Lamps Net Weight	Qty/Carton	Size	Weight/Carton
Inner Box	4.4 lbs	1 PCS	9.3" x 8.9" x 10.6"	5.7 lbs
Outer Box	4.4 lbs	2 PCS	18.4" x 9.8" x 11.4"	12.56 lbs

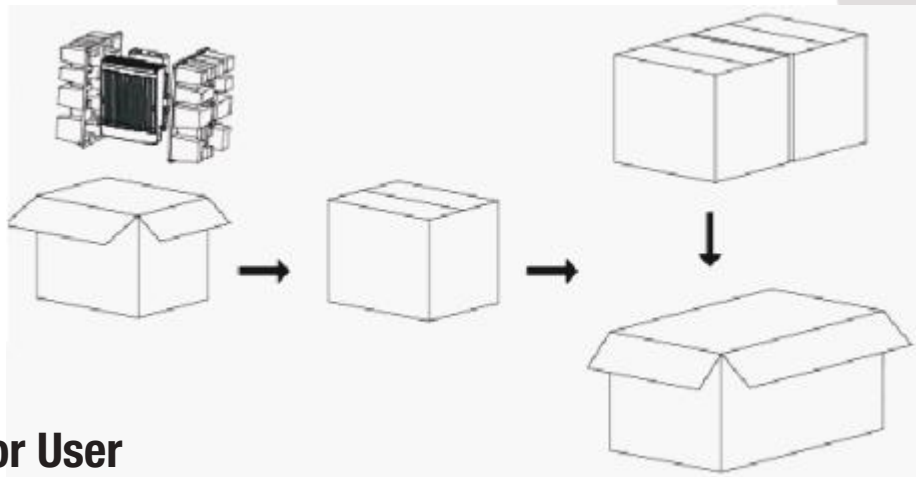

Notice For User

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated
- Licensed Electrician Installation ONLY.

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 01/24/2019

1939 Parker Court Suite C, Stone Mountain, GA 30087 | Phone: (866) 786-1117 |



www.beyondledtechnology.com

Adjustable Landscaping Light

Outdoor Lighting

Light Distribution Testing Parameters

Lumens(lm): 6114.58
 Efficiency(%): 0.00%
 Lumens(lm)/Power(W): 116.40
 Central Intensity(cd): 2141.353
 Maximum Intensity(cd): 4459.257
 Angle of Maximum Intensity: C=22.5 y=35.0
 Beam Angle(50%Imax): [C0/180]Total=104.3
 [C90/270]Total=41.4
 Field Angle(10%Imax): [C0/180]Total=130.8
 [C90/270]Total=116.0
 Maximum s/h(1/2): C0_180=1.91 C90_270=1.39
 Maximum s/h(1/4): C0_180=1.69 C90_270=1.17
 Up Flux Rate of Lamp(%):0.00%
 Down Flux Rate of Lamp(%):0.00%
 Up Flux Rate of LUM(%): 0.11%
 Down Flux Rate of LUM(%): 99.89%
 CIE Type: Direct Lighting
 Output Flux Ratio in π Solid Angle: 91.277%

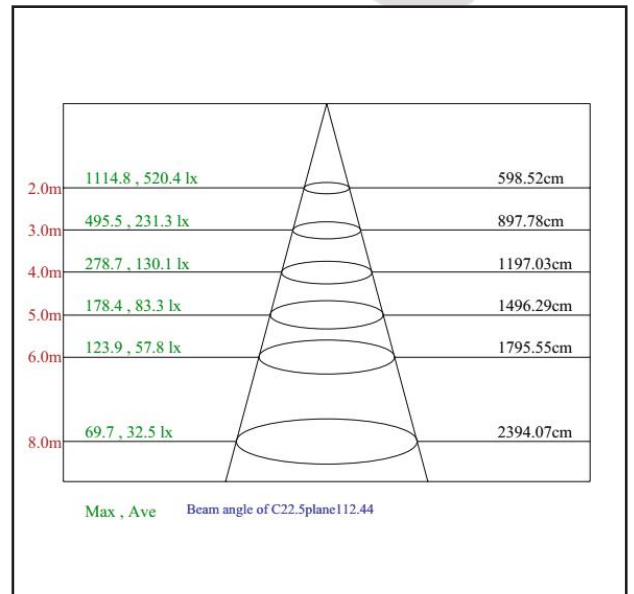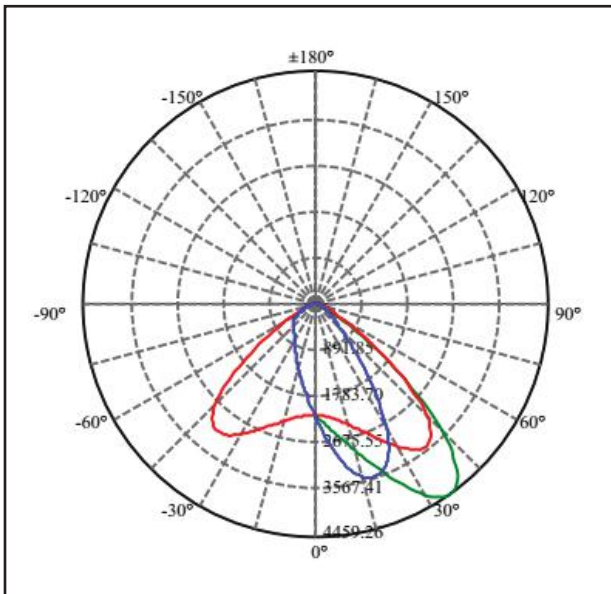

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 01/24/2019

1939 Parker Court Suite C, Stone Mountain, GA 30087 | Phone: (866) 786-1117 |

www.beyondledtechnology.com

