



# CHIMNEY HOUSING

**Rectangle Kit 4' No. 201**  
- 2' Ext. No 202  
**Square Kit 4' No. 301**  
- 2' Ext. No. 302



1. Layout 4 mounting brackets (MB) and screw to roof.
2. Cut flashing and bend up inside edges approx. 1". Position on roof on outside edge of mounting brackets. Install in order as indicated 2A-2B-2C. Apply small amount of roof coating under each before nailing in position. NOTE: For new installations only. Existing installations may already have flashing. (Not included)
3. Assemble chimney panels (A). Position unit on roof outside of mounting brackets. Drill and screw (2 each corner). (B)
4. Cut cap opening to desired pipe size. Screw cap to chimney panels.
5. Position and screw 4 trim units against lower edge of cap.
6. Install roofing.

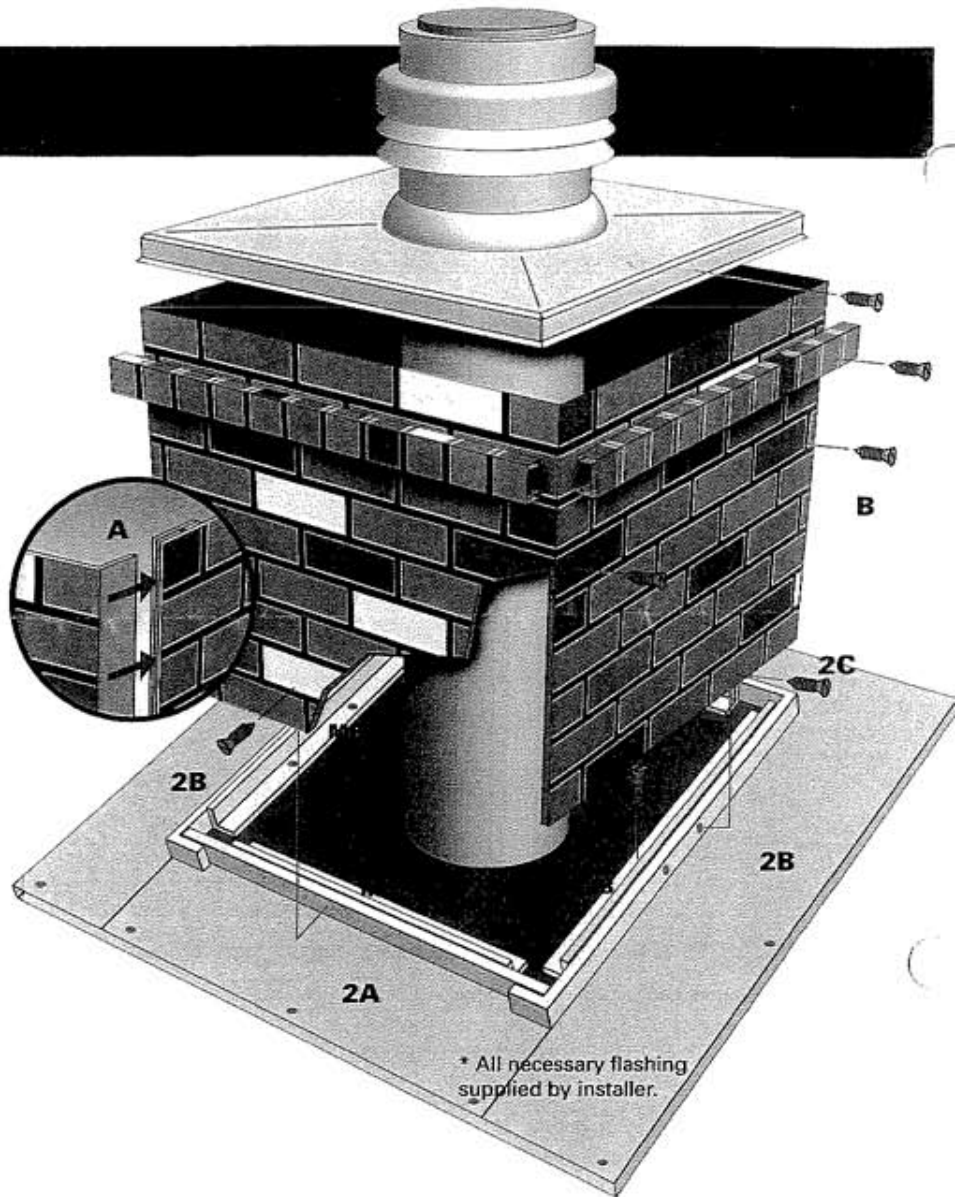

**The R-CO Chimney Housing is virtually impossible to tell from a brick and mortar chimney; is attractively priced and adds to home appearance and value. Easy handling and storage - UPS shipping -**



1855 Big Tree Rd. · Lakewood, NY 14750  
716-763-1825 · 800-854-7657

**Specifications:** Standard sizes: 18-3/4" x 23-1/2" x 48"  
23 1/2" x 23 1/2" x 48"  
24" high extensions for above units can be used in multiples  
Other sizes available - (special order)

All larger sizes have reinforcement channels welded 24" on center. Also available, three (3) sided chases for wall mounting - from ground level to desired heights.

**Construction:** Coated 22 gauge steel interlocking all joints. Exterior finish - space guard coating: available in brick or stucco design.

**Installation:** Mounting brackets must be properly secured with lag bolts e.g. (or bolts for larger units) to a solid framed opening.

Install sheet metal screws on all vertical and horizontal joints - 12" on center.